




10/537615
PCT/GB 2003 / 000000

G1003/05197

INVESTOR IN PEOPLE

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

M. C. Jenkins

Dated 3 February 2004

Patents Form 1/77

Patents Act 1977
(Rule 16)



1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

P17128GB/JCC/lp

2. Patent application number

04 DEC 2002

0228294.5

05DEC02 F768578-9 000389

P01/7700 0.00-0228294.5

(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)

F.X.K. Patents Ltd.,
The Old School House,
Church Hill,
Akeley,
Buckinghamshire MK18 5HB

08521346001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

4. Title of the invention

IMPROVEMENTS IN OR RELATING TO VALVES

5. Name of your agent (if you have one)

Forrester Ketley & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Forrester House
52 Bounds Green Road
London
N11 2EY

Patents ADP number (if you know it)

133001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

| | |
|-------------|--------------|
| Description | 15 |
| Claim(s) | 6 |
| Abstract | 0 <i>DMC</i> |
| Drawing(s) | 7+7 |

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature *Forrester Ketley & Co* Date

4th December 2002

Forrester Ketley & Co.

12. Name and daytime telephone number of person to contact in the United Kingdom

(020) 8889 6622 HOWDEN, C.A.

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION OF INVENTION

Title: "Improvements in or relating to valves"

- 5 THIS INVENTION relates to fluid control valves, such as valves for the control of the flow of air or other gases, for example in pressure regulating and pressure reducing valves.

- GB2298026 describes a valve module for a pressure regulator - or pressure
10 reducer - which closely approaches the ideal of an inlet valve which is in perfect balance when primary pressure is applied to an inlet connection, and the valve is in the closed condition.

- The valve module of GB2298026 is of particular utility for a pressure regulator
15 for controlling pressurised gas supplied from a storage cylinder, where the primary pressure applied to the regulator is progressively reduced as the volume of air or other gas within the cylinder is used up.

- GB2298026 discloses a poppet valve comprising a valve port, a valve seat
20 around the valve port, a valve member co-operating with the valve seat and displaceable along an axis passing through said port and having a stem extending through said port, and a shoulder for sealing engagement with said seat, and wherein said valve member has a bore extending into the valve member from an end thereof remote from said stem and communicating with an
25 outlet from said stem, biasing means being provided biasing said valve member towards its closed position and wherein a piston is sealingly slidable in the said bore, whereby the effective area of said valve member acted on by the fluid pressure difference between said first and second sides of said valve is

substantially reduced as compared with the area encompassed by said valve seat.

It is among the objects of the present invention to provide an improved form of
5 the valve of GB2298026.

According to one aspect of the invention there is provided a valve including a valve housing providing a chamber accommodating at least part of a valve member, said chamber forming at least part of a first or high pressure side of
10 said valve, a valve port leading from said chamber to a second or low-pressure side of said valve, a valve seat around the valve port, said valve member having a seating surface co-operating with the valve seat and the valve member being displaceable, along an axis passing through said port, respectively (a) in a first
15 direction, to move said seating surface into said chamber and away from said valve seat and (b) in a second, opposite direction, to move said seating surface towards said valve seat, biasing means being provided biasing said valve member in said second direction towards its closed position, wherein the valve housing affords, on third low pressure side, a shroud or wall extending transversely with respect to the valve access and spaced from said annular
20 orifice so as to deflect any gas proceeding from said annular orifice in a direction parallel with said valve access, the valve housing defining with said shroud or transverse wall one or more transverse passages leading to opening at the sides of the valve housing, for the passage of gas issuing from said valve port.

25

According to another aspect of the invention there is provided a valve including a valve housing providing a chamber accommodating at least part of a valve member, said chamber forming at least part of a first or high pressure side of

said valve, a valve port leading from said chamber to a second or low-pressure side of said valve, a valve seat around the valve port, said valve member having a seating surface co-operating with the valve seat and the valve member being displaceable, along an axis passing through said port, respectively (a) in a first direction, to move said seating surface into said chamber and away from said valve seat and (b) in a second, opposite direction, to move said seating surface towards said valve seat, the valve member having a bore extending axially from the high pressure end thereof and forming a cylinder sealingly slidable, in said first and second directions, on a piston fixed within said valve housing, to define therewith a further chamber, biasing means being provided biasing said valve member in said second direction towards its closed position, said further chamber in either case communicating with the low pressure side of the valve, whereby the effective area of said valve member acted on by the fluid pressure difference between said first and second sides of said valve is substantially reduced as compared with the area encompassed by said valve seat, and wherein said piston has a base part providing an outer periphery received in an internal recess or groove provided around a bore which extends axially into the valve housing from a high pressure end thereof and which bore at least partially defines said chamber accommodating the valve member, said internal recess or groove being disposed at a location remote from said valve seat, the valve housing having one or more longitudinal slits therethrough extending from the high pressure end of the valve housing, (i.e. the end remote from said valve seat) adjacent said internal groove or recess and extending through the location of said internal groove or recess, the material of the valve housing being sufficiently resilient to allow the wall of the valve housing to be flexed outwardly sufficiently to allow said base part to pass within said bore in the valve housing from said high pressure end thereof to the axial position of said internal groove or recess and thereafter to spring back around said base part to locate said base part in said internal groove or recess.

According to a yet further aspect of the invention there is provided a sealing arrangement comprising a body having a bore, a seal for sealing said bore with respect to a piston or the like member disposed centrally within the bore and providing a larger diameter portion engaging, or closer to, the wall of said bore and a smaller diameter portion on a higher pressure side of said larger diameter portion, said seal comprising a resilient material which is generally U-shaped in half-section along the axis of said bore, the seal providing a base part abutting a shoulder extending from the periphery of said larger diameter part to the periphery of said smaller diameter part, said base providing the base of the U-section, the seal including an inner sleeve, defining an inner limb of said U-section and extending around said smaller diameter part, and extending away from said base to a free edge, the seal further including an outer sleeve extending from said base part along said bore to a free edge of the outer sleeve, said outer sleeve defining the other limb of said U-section, and wherein said outer sleeve, in an unstressed state of said seal, (and thus in an un-installed state) diverges slightly from the axis of the seal, with increasing distance from said base.

In the accompanying drawings:-

FIGURE 1 is a view in axial section of a valve module described in GB2298026,

FIGURE 2 is a view in axial section of a pressure reducing valve incorporating a valve module in accordance with Figure 1,

FIGURES 3 and 4 are views similar to Figure 2 of other forms of valve incorporating valve modules in accordance with Figure 1,

FIGURE 5 is a view in axial section of a variant embodying the present invention of the valve module of Figure 1,

- 5 FIGURE 6 is an axial section view of a variant, embodying the invention, of the valve module of Figure 5, with the valve member shown in a closed position on the right-hand side,

- FIGURE 7 is a view in axial section through the valve housing of the valve
10 module of Figure 6, and

FIGURE 8 is a view in axial section, to an enlarged scale of a seal forming part of the valve module of Figures 5 to 7.

- 15 Referring to Figure 1, the valve module shown possesses substantial circular symmetry about an axis A in the plane of the drawing. The valve module comprises a hollow generally cylindrical body 2 including an end part 4 and an externally screw threaded portion 6 extending from end part 4 and of reduced diameter with respect to the part 4, whereby the peripheral region of part 4
20 forms an outwardly directed annular flange. A chamfered annular groove 8 is formed around the body 2, between the flange formed by the end portion 4 and the externally screwthreaded part of portion 6. A sealing O-ring 7 is received in this groove.
- 25 The body 2 has a stepped axial bore therethrough within which is accommodated a hollow valve member or poppet 3. This stepped bore includes a port 10 extending through end part 4 and a bore portion 12 which is of increased diameter with respect to port 10. The bore portion 12 extends to the end of body 2 remote from part 4 and has an internal screw thread over a region

- immediately adjacent the last-mentioned end of the body. The valve member or poppet 3 includes a stem portion 14 which extends freely through the port 10 and a body portion 16 of larger diameter than the stem portion 14 and of larger diameter than the port 10. At its end nearer port 10, the bore 12 terminates in an internal shoulder which meets the port 10 in an annular edge or rim which forms a valve seat. The poppet 3 has, around its periphery, an annular shoulder 18 facing towards the valve seat and extending from the periphery of the stem portion 14 to the periphery of part 16. A seating surface of the poppet, for engagement with the valve seat, is provided by a ring or fillet 20 of elastomeric material received on said shoulder 18. As shown, this ring 20 of elastomeric material occupies the "corner" region between the shoulder 18 and the periphery of stem portion 14. The ring or fillet 20 presents, towards the valve seat, a surface which is generally frusto-conical about axis A.
- 15 The elastomeric material forming ring or fillet 20 may be applied initially in a liquid or fluid state and caused to cure in situ on the poppet 3, so as to be bonded thereto.

- In a variant, not shown, the poppet 3 is made as a unitary body of an appropriate polymer, such as polyethylene, nylon or polyurethane. In this case, the form of the poppet may be substantially that of the poppet 3 plus fillet 20 of Figure 1, i.e. the fillet 20 may be formed as an integral part of the poppet rather than as a separately formed item.

- 25 The larger diameter part 16 of the poppet 3 has a bore 22 extending axially from its end remote from the stem portion 14. The stem portion 14 has an axial bore 24 of lesser diameter than the bore 22 and communicating with the bore 22. In the embodiment shown in the drawing, the bore 22 communicates with the bore 24 via a frusto-conical tapering bore section 26. The bore 24 is

internally screwthreaded at its upper end (as viewed in Figure 1) to receive a tappet or other member (not shown in Figure 1 see below) and a transverse bore 28 through the stem 14 provides communication between the bores 22, 24 and the low-pressure side of the valve.

5

Received as a close sliding fit in the bore 22 is a piston 30 having a head 32 and a cylindrical body 34 extending from the head 32 in the direction away from the valve seat, to engage a spigot portion 36 of a retaining insert 38, which is screw threadedly received in the internally screw threaded end portion of bore 12

10 remote from the valve seat. Holes 40 are provided through the region of the insert 38 between its periphery and the spigot portion 36 for the passage of the gas which the valve is intended to control.

The piston body 34 carries an annular seal 42 which seals the piston 30 with
15 respect to the bore 22 of the poppet 3. A spigot 44 projects axially from the piston head 30 towards the narrower bore 24 of the poppet 3 and serves to locate one end of a biasing compression spring 46, the other end of which engages abutment means in the stem portion 14 of the poppet 3, for example
20 the tappet or other member referred to above (not shown in Figure 1) screwed into the upper end of bore 24. The spring 46 thus urges the poppet 3, relative to piston 30, towards the valve seat. The spigot portion 36 of insert 38 is of a size to pass freely within the bore 22 in the poppet 3 so as not to obstruct displacement of the poppet away from the valve seat.

25 The piston body 34 is, at its end remote from head 32, externally screw threaded and screwed into an internally screw threaded axial bore through insert 38 whereby the piston 30 is retained against movement relative to the body 2.

The seal 42 may be made of tough P.T.F.E. and ensures effective sealing between the piston 30 and the poppet 3 whilst affording little friction between the seal 42 and the poppet 3, even at high primary pressures. Consequently the spring 46 need only be a light spring.

5

In use of the valve module shown in Figure 1 (and as will appear from the description below with reference to Figures 2 to 4) the space 21 within the bore 12 and extending around the exterior of portion 16 of the poppet 3 is exposed to the high or primary gas pressure, and is thus on the high pressure side of the valve module, whilst the bore 24 and the external face of part 4 facing away from portion 6 is exposed to the low, secondary, set or regulated gas pressure, and are thus on the low pressure side of the valve module.

In the arrangement shown, the diameter of the bore 22 is substantially equal to that of the port 10 (i.e. to the inner diameter of the valve seat), so that, when the valve is closed, the gas pressure on the low pressure side of the valve module produces no net force parallel to the axis A on the poppet 3 and likewise, neglecting the finite width of the valve seat, the gas pressure on the high pressure side of the valve module produces no net force parallel to the axis A on the poppet 3. The valve is thus, in principle, balanced. At the same time, the diameter of the valve seat is substantially larger than would be practicable for an unbalanced valve, in many applications, allowing for substantially greater gas flow rates.

25 Accordingly, a small complete inlet valve assembly or module, of the kind described with reference to Figure 1, can serve a wide range of pressure regulator requirements and, being in modular form, can be assembled and tested independently of any valve body into which it may be eventually fitted.

The assembly shown in Figure 1 comprises a prefabricated module which can be readily fitted into a wide variety of pressure regulating valves or demand valves designed to receive the module. The bore 24, adjacent the free end of stem 14, may be internally screw threaded to receive any of a variety of fitments according to the intended use of the valve. It is thus possible for the prefabricated module of Figure 1, (or the variant of Figure 5, described below) to be manufactured and fully tested by a specialist manufacturer and supplied to various different manufacturers of pressure regulating valves, demand valves, etc. for fitting in the latter.

Referring to Figure 2, a pressure regulating valve is illustrated having a body 50 providing a cylindrical chamber 52 in which a reaction member or piston 54 is sealingly slidable. A screw threaded bore 56 extends from an end wall 58 of chamber 52 and receives a valve module 60 such as the valve module described with reference to Figure 1, the externally threaded portion 6 of the body 2 of the module being screwed into the bore 56. When the module is fitted in the valve body 50 as shown in Figure 2, the O-ring 7 is received in an annular rebate formed around the bore 56 between the end wall 58 and the screw threaded portion of bore 56, thereby sealing the body 2 with respect to the body 50. The lower end of the bore 56 communicates with an inlet port 62 in an inlet coupling 64 adapted to be screwed into a discharge fitting of a compressed gas cylinder, for example. The reaction member 54 has a central aperture 66 therethrough via which, in certain positions of the valve as described below, gas can vent from the chamber 52. A valve member 68 having a stem (not shown) screwed into the upper end of stem 14 co-operates with the aperture 66 and normally seals off the aperture 66. The reaction member 54 is urged towards the valve module and thus towards engagement with the valve member 68 by a compression spring indicated schematically at 70. The spring 70 is held

in compression between the reaction member 54 and a cap 72 screwed into an internally threaded enlarged upper portion of the bore 52. As shown, the cap 72 has an aperture 74 therethrough for venting purposes.

- 5 An outlet passage 76 for gas communicates with the interior of chamber 52. In operation, if the pressure in chamber 52 falls below a predetermined level determined by the spring 70 (as a result of gas being drawn from the chamber 52 via the port 76) the spring 70 displaces the reaction member 54 and thus, via the valve member 68, the poppet 3 of the module 60 downwards as viewed in
- 10 Figure 2, thereby displacing the poppet seal 20 from the co-operating valve seat and allowing gas under pressure, from inlet 62, to pass into the chamber 52, thereby raising the pressure in chamber 52 to counteract the tendency of the spring 70 to displace the reaction member 54 downwardly. If, as a result of some fault in the valve module 2, for example, as a result of the seal 20 failing
- 15 to seat sealingly on the valve seat, gas under pressure should continue to leak through the valve module into the chamber 52 despite the pressure in chamber 52 being at or above the preset pressure, the reaction member 54 will be forced upwardly so as to disengage the valve member 68 from its sealing engagement around the lower end of aperture 66, allowing excess pressure to vent through
- 20 the aperture 66 past the valve member 68.

Figures 3 and 4 illustrate valve modules of the same form incorporated in demand valves. Figure 3 illustrates a demand valve for a breathing apparatus suitable for fire-fighters, for example, whilst Figure 4 illustrates a demand

25 valve for a diving system. In the arrangements of these figures, the upper end of the stem 14 carries a chamfered annular valve plate 80 secured to the upper end of the valve stem 14 by a retaining screw 82 screwed into the valve stem. The frusto-conical surface of the valve plate 80, in each case, co-operates with an annular sealing bead 84 around a central aperture in a diaphragm 86 which

divides a chamber provided within the valve body into a first region 85, in communication with the low pressure side of the valve module and a venting chamber 87 on the opposite side of the diaphragm 86 from the valve plate 80. In each case, the valve module body 2 is screwed into a complementary screw threaded bore provided in the body of the valve proper and is sealed with respect thereto by the O-ring 7 in substantially the same way as described in relation to Figure 2.

In the designs shown for the valve module of Figure 1, (GB2298026), the valve body or housing 2 terminates at the outlet end, in an open annulus defined between the valve port 10 in the body 2 itself, and the stem 14 of the poppet 3. This feature provides maximum free flow, but that freedom of flow can cause practical problems for some applications.

It has now been found that if the top of the module body or housing 2 is extended upwards, to form a transverse wall or shroud 200 (Fig. 5), this prevents direct upward flow of the out flowing working gas. In addition to this benefit, a bearing surface is provided by an axial bore in the shroud or wall 200, to support and guide the axial extension 14 of the poppet 3 and to maintain the alignment of the latter, and thus eliminating any tendency of the poppet seating 20 to move out of line. The extension 200 of the valve body 21 is, effectively, bored out to the seat diameter of the valve port or seat 10 up to a distance just short of the top of the extension 14, to allow free flow of gas, whilst the remaining portion of the shroud forms a bearing for the extension 14. To provide output flow of gas, transverse outlet bores 113 of any convenient number and size radiate from within the axial bore in the shroud 200 to respective openings on the periphery of the valve housing, so that gas outflow is translated from the axial sense to the radial sense.

In many cases, (cf. Figures 3 and 4) the pressure take-off from the module is in a plane at, or below the surface of the material into which the module is mounted. It is now proposed, in order to aid this downward flow, to undercut part of the side wall of the valve housing in the region of the extension or shroud 200 at an angle to the valve axis to provide a sloping peripheral wall or surface 144 of the valve housing. As the air, or other working gas flows from the radial holes 113, the angle of the exit of the truncated radial holes, and the angle of the wall, causes dynamic adhesion to the gas medium, so that instead of the flow being truly radial, it flows naturally outward, and downward towards the outlet port, or downstream passageway of the demand valve or the like in which the valve module is fitted. By this means, any tendency for the air flow to impinge on the underside of the reaction member of, say, a pressure regulator, is very much reduced, or even, dependent upon the conditions, eliminated. Where, as illustrated, the valve housing has substantial rotational symmetry about its central axis, the inclined surface 144 is part-conical and the upper end of the shroud forms, at its periphery, a projecting annular ledge.

The valve module of GB2298026 shown in Figure 1 can be further improved, from a production point of view, by eliminating the screw threaded connection between the base 38 of the piston member 30 and the valve housing. Whilst, as shown in Figure 5, the base 38a may simply be a push-fit in a recess formed around the lower end of the axial bore in the valve housing, and retained in place by a circlip 118 engaging in a circumferential groove around the wall of such a recess, a further improved design is possible. In this improved design, shown in Figures 6 and 7, the valve body 2 is conveniently slit longitudinally four or so times, as shown at 130 in Figure 7, like a collet from its lower edge like a collet. The valve body 2 in this case, is formed with a circumferential groove internally adjacent its lower end and has a chamfered

mouth, 210 at its lower end so that the piston support flange 38b, i.e. the base part of the piston 32, which may be chamfered at its outer edge, can be snapped into place. With the elimination of the circlip any possibility for the circlip to offer any impedance to the inlet air passages 40 through the flange or base part 30b is also eliminated, thus helping to optimise the airflow capacity of the module.

It has been found that the contour and proportions of the conventional plastics seals are not suitable for sensitive pressure control functions, as they are thick and insensitive. Even the seal 42 of the valve of Figure 1 is deficient in this respect. A new seal contour has been developed by the inventor, to overcome these shortcomings. A cross section of the newly developed seal is shown in Figure 8. The seal is, of course, generally annular in form having rotation of symmetry about its central axis A. Figure 8 is a view in section along that axis. It is in the nature of PTFE and similar materials that they have very limited stretch ability and poor memory. Therefore, very careful sizing, shaping and proportioning is necessary to ensure that the sealing lip of a seal made of such material is in firm, but tight contact with the bore against which it is to seal, e.g. with the bore 22 in valve member 3 where the seal is used on piston member 30.

When using the developed form shown in Figure 8, it has been found possible to use the same seal for both high pressure and low pressure module applications, thus overcoming the problem of sensitivity to variable pressure supply, encountered with the use of 'O' rings. The use of one seal for both applications provides a useful degree of economy in the manufacture of component parts. With this improvement in design, the only difference between a high pressure and low pressure valves module of the kind shown in the drawings lies in the choice of poppet return spring. This difference is

dictated by the extra seal drag which can be experienced by a module subject to hundreds of atmospheres, whereas, for really sensitive valves, such as a breathing apparatus demand valve, the slight extra thrust of the high pressure spring, can constitute a significant proportion of the allowable actuating or
 5 signal pressure. Typically, the inlet pressure of such a demand valve would rarely be higher than something of the order of 10 bar.

Figure 8 shows typical dimensions of the improved seal for the external and internal diameters concerned. The critical features are the curves and
 10 angles, within the notional (not manufacturing) tolerances shown. But the proportional dimensions will apply for seals of this type of whatever size.

The seal of Figure 8 is of a resilient material and is generally U-shaped in half-section along the central axis A. The seal provides a base part 300 which, when the seal is fitted, for example in place of the seal 42 in the valve
 15 module of Figs. 1,5,6 or 7, abuts the shoulder of the piston 30,32 which extends from the periphery of the head 32 of the piston to the periphery of the integral smaller diameter shank or rod of the piston, said base 300 providing the base of the U-section. The seal includes an inner sleeve 302, defining an inner limb of said U-section and extending around said smaller diameter piston rod, and
 20 extending away from said base 300 to a free edge of the inner sleeve. The seal further includes an outer sleeve 304 extending from said base part along said bore to a free edge of the outer sleeve, said outer sleeve defining the other limb of said U-section. The outer sleeve 304, in the unstressed state of the seal shown in Fig. 8, (Which is its un-installed state) diverges slightly from the axis
 25 A of the seal, with increasing distance from said base 300. Similarly, the inner sleeve, in an un-stressed state of the seal, converges slightly towards said central axis A of the seal with increasing distance from said annular base 300. The outer sleeve 304 tapers in radial thickness towards its free edge. The outer sleeve, in semi-axial section, is curved outwardly towards its free edge.

As shown, the thickness of the base part 300, measured axially, is greater than twice the greatest radial thickness of the outer sleeve and greater than twice the greatest thickness of the inner sleeve.

- 5 Whereas PTFE is mentioned as a suitable seal material, other types of plastics may be employed. For example, where such a valve module design is used in industrial pneumatics applications, injection moulded, polyethylene could be used, either in "as moulded" condition, or subjected to gamma irradiation. Use of this, injection-moulding material could significantly reduce
- 10 production cost.

CLAIMS

5 1. A valve including a valve housing providing a chamber accommodating at least part of a valve member, said chamber forming at least part of a first or high pressure side of said valve, a valve port leading from said chamber to a second or low-pressure side of said valve, a valve seat around the valve port, said valve member having a seating surface co-operating with the valve seat
10 and the valve member being displaceable, along an axis passing through said port, respectively (a) in a first direction, to move said seating surface into said chamber and away from said valve seat and (b) in a second, opposite direction, to move said seating surface towards said valve seat, biasing means being provided biasing said valve member in said second direction towards its closed
15 position, wherein the valve housing affords, on third low pressure side, a shroud or wall extending transversely with respect to the valve access and spaced from said annular orifice so as to deflect any gas proceeding from said annular orifice in a direction parallel with said valve access, the valve housing defining with said shroud or transverse wall one or more transverse passages
20 leading to opening at the sides of the valve housing, for the passage of gas issuing from said valve port.

2. A valve as claimed in Claim 1 wherein said transverse wall or shroud has a central aperture through which extends, as a sliding fit, a central axial
25 extension of said valve member, whereby the valve member is reliably guided
----- for said axial movement. -----

3. A valve as claimed in Claim 1 or Claim 2 wherein the periphery of the valve housing is undercut in the region behind the transverse wall, (that is to

say the region which has a position, along said axis, closer to said valve seat than said transverse wall), in such a way that said undercut region, from a position adjacent said transverse wall which is closer to said axis than the periphery of said transverse wall, becomes gradually increasingly spaced from said axis with distance, measured parallel with said axis, away from said transverse wall, so that over said undercut region, the peripheral surface of the valve body is inclined with respect to said axis, and wherein the or each said opening or openings at the side of the valve body opens onto said inclined peripheral surface.

10

4. A valve including a valve housing providing a chamber accommodating at least part of a valve member, said chamber forming at least part of a first or high pressure side of said valve, a valve port leading from said chamber to a second or low-pressure side of said valve, a valve seat around the valve port, said valve member having a seating surface co-operating with the valve seat and the valve member being displaceable, along an axis passing through said port, respectively (a) in a first direction, to move said seating surface into said chamber and away from said valve seat and (b) in a second, opposite direction, to move said seating surface towards said valve seat, the valve member having a bore extending axially from the high pressure end thereof and forming a cylinder sealingly slidable, in said first and second directions, on a piston fixed within said valve housing, to define therewith a further chamber, biasing means being provided biasing said valve member in said second direction towards its closed position, said further chamber in either case communicating with the low pressure side of the valve, whereby the effective area of said valve member acted on by the fluid pressure difference between said first and second sides of said valve is substantially reduced as compared with the area encompassed by said valve seat, and wherein said piston has a base part providing an outer periphery received in an internal recess or groove provided around a bore which

25

extends axially into the valve housing from a high pressure end thereof and which bore at least partially defines said chamber accommodating the valve member, said internal recess or groove being disposed at a location remote from said valve seat, the valve housing having one or more longitudinal slits

- 5 therethrough extending from the high pressure end of the valve housing, (i.e. the end remote from said valve seat) adjacent said internal groove or recess and extending through the location of said internal groove or recess, the material of the valve housing being sufficiently resilient to allow the wall of the valve housing to be flexed outwardly sufficiently to allow said base part to pass
- 10 within said bore in the valve housing from said high pressure end thereof to the axial position of said internal groove or recess and thereafter to spring back around said base part to locate said base part in said internal groove or recess.

5. A valve including a valve housing providing a chamber accommodating
- 15 at least part of a valve member, said chamber forming at least part of a first or high pressure side of said valve, a valve port leading from said chamber to a second or low-pressure side of said valve, a valve seat around the valve port, said valve member having a seating surface co-operating with the valve seat and the valve member being displaceable, along an axis passing through said
- 20 port, respectively (a) in a first direction, to move said seating surface into said chamber and away from said valve seat and (b) in a second, opposite direction, to move said seating surface towards said valve seat, the valve member having a bore extending axially from the high pressure end thereof and forming a cylinder sealingly slidable, in said first and second directions, on a piston fixed
- 25 within said valve housing, to define therewith a further chamber, biasing means being provided biasing said valve member in said second direction towards its closed position, said further chamber in either case communicating with the low pressure side of the valve, whereby the effective area of said valve member acted on by the fluid pressure difference between said first and second sides of

said valve is substantially reduced as compared with the area encompassed by said valve seat, and wherein said piston has a base part providing an outer periphery received in an internal recess or groove provided around a bore which extends axially into the valve housing from a high pressure end thereof and
5 which bore at least partially defines said chamber accommodating the valve member, said internal recess or groove being disposed at a location remote from said valve seat, wherein the base part is designed for resilient inward flexing to allow it to be inserted in the bore in the valve housing from said high pressure end thereof to spring into said groove when the base part is at the longitudinal
10 position of said internal groove or recess, thereby to retain said piston in place.

6. A valve as claimed in Claim 4 or claim 5 wherein the lower edge, (high pressure edge) of the bore in the valve housing is internally chamfered and/or wherein the outer edge of said base part is externally chamfered, to facilitate
15 insertion of the base part into the bore in the valve housing from said lower end (high pressure end) of the valve housing.

7. A sealing arrangement comprising a body having a bore, a seal for sealing said bore with respect to a piston or the like member disposed centrally
20 within the bore and providing a larger diameter portion engaging, or closer to, the wall of said bore and a smaller diameter portion on a higher pressure side of said larger diameter portion, said seal comprising a resilient material which is generally U-shaped in half-section along the axis of said bore, the seal providing a base part abutting a shoulder extending from the periphery of said
25 larger diameter part to the periphery of said smaller diameter part, said base providing the base of the U-section, the seal including an inner sleeve, defining an inner limb of said U-section and extending around said smaller diameter part, and extending away from said base to a free edge, the seal further including an outer sleeve extending from said base part along said bore to a free

edge of the outer sleeve, said outer sleeve defining the other limb of said U-section, and wherein said outer sleeve, in an unstressed state of said seal, (and thus in an un-installed state) diverges slightly from the axis of the seal, with increasing distance from said base.

5

8. A sealing arrangement according to Claim 7 wherein the inner sleeve, in an un-stressed state of the seal, converges slightly towards said central axis of the seal with increasing distance from said annular base.

10 9. A sealing arrangement according to Claim 7 or Claim 8 wherein the outer sleeve tapers in radial thickness towards said free edge thereof.

10. A sealing arrangement according to any of claims 7 to 9 wherein the outer sleeve, in semi-axial section, is curved outwardly towards said free edge.

15


11. A sealing arrangement according to any of Claims 7 to 10 wherein the thickness of the base part - measured axially - is greater than twice the greatest radial thickness of the outer sleeve.

20 12. A sealing arrangement according to any of Claims 7 to 11 wherein the thickness of the base part - measured axially, is greater than twice the greatest thickness of the inner sleeve.

25 13. A sealing arrangement according to any f claims 7 to 12 wherein the seal is of PTFE.


14. A sealing arrangement according to any of claims 7 to 12 wherein the seal is of polyethylene.

15. A sealing arrangement according to Claim 14 wherein the seal is formed by injection moulding followed by gamma radiation.
- 5 16. A valve according to any of Claims 4 to 6 wherein said piston is sealed with respect to the bore in the valve member by a seal arrangement according to any of Claims 7 to 15.
- 10 17. A valve substantially as hereinbefore described with reference to and as shown in Figures 5 to 8 of the accompanying drawings.
18. A sealing arrangement according to Claim 7 and including a seal substantially as hereinbefore described with reference to and as shown in Figure 8 of the accompanying drawings.



1/7

Fig.1.

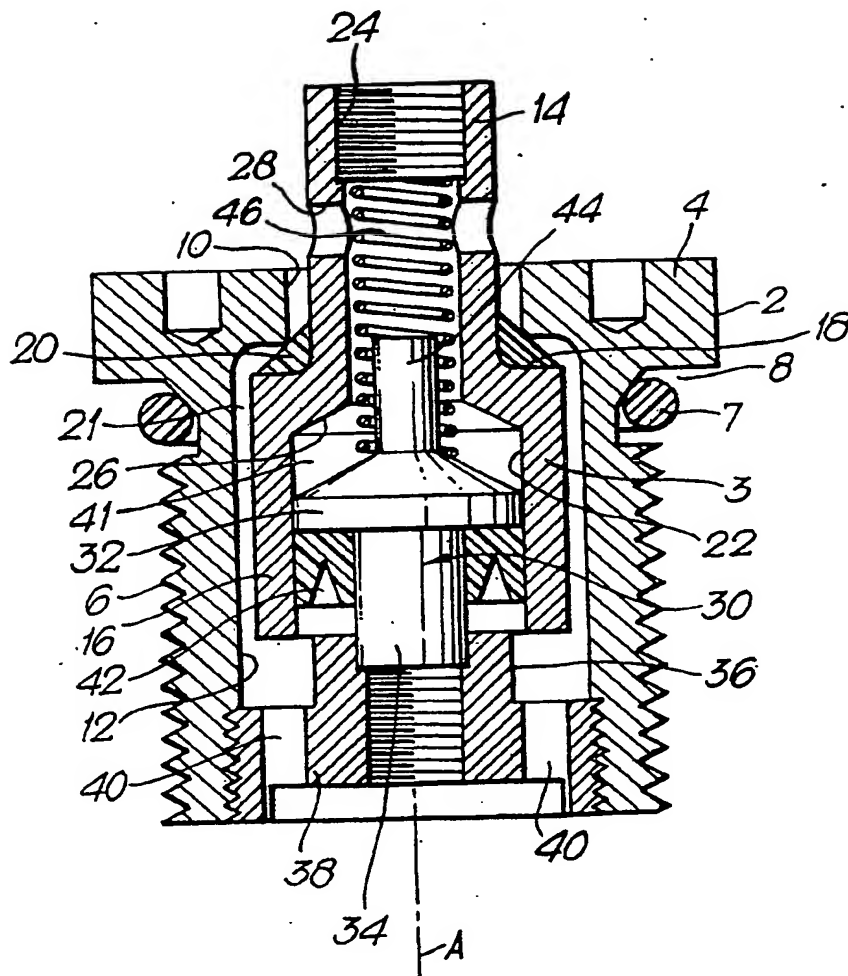

2/7

2/7

Fig.2.


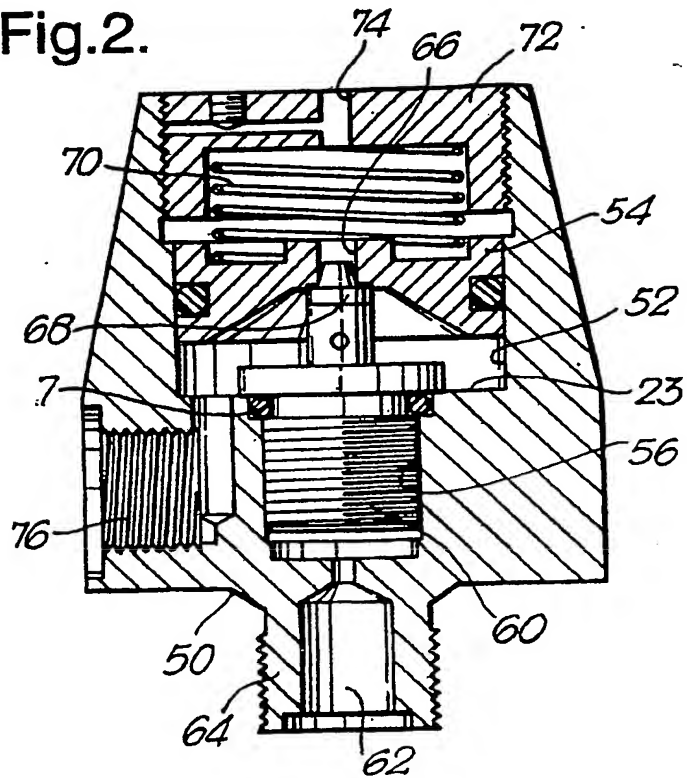



Fig.3.

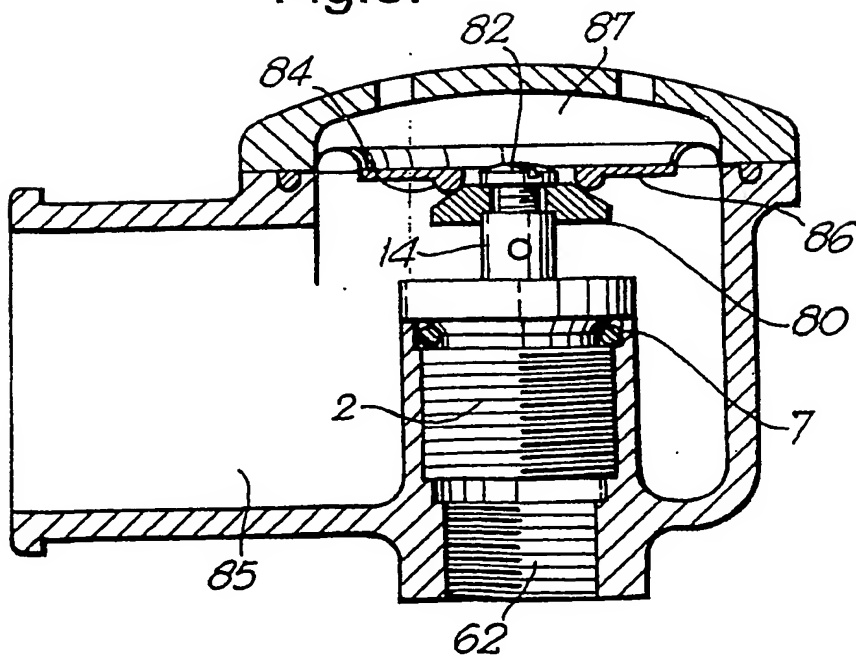

3/7

3/8

Fig.4.

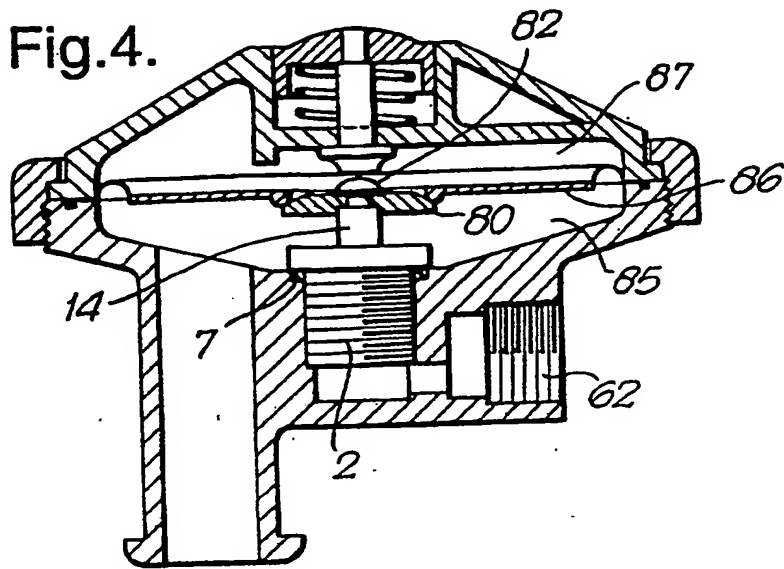

4/7

③ F. X. Key

DEVELOPMENTS

THE OLD SCHOOL HOUSE, ADELEY
-BOOTS, NORTON S110



KIM/04 Module. (HJ)

MATL:

GEN TAL: 7.1
GEN TIA: dlu
CACKENTRICITY:
-DA F.I.R.
SCALE ~ 10:1

2.9-04/H

PROPERTY OF
CONCORDIA

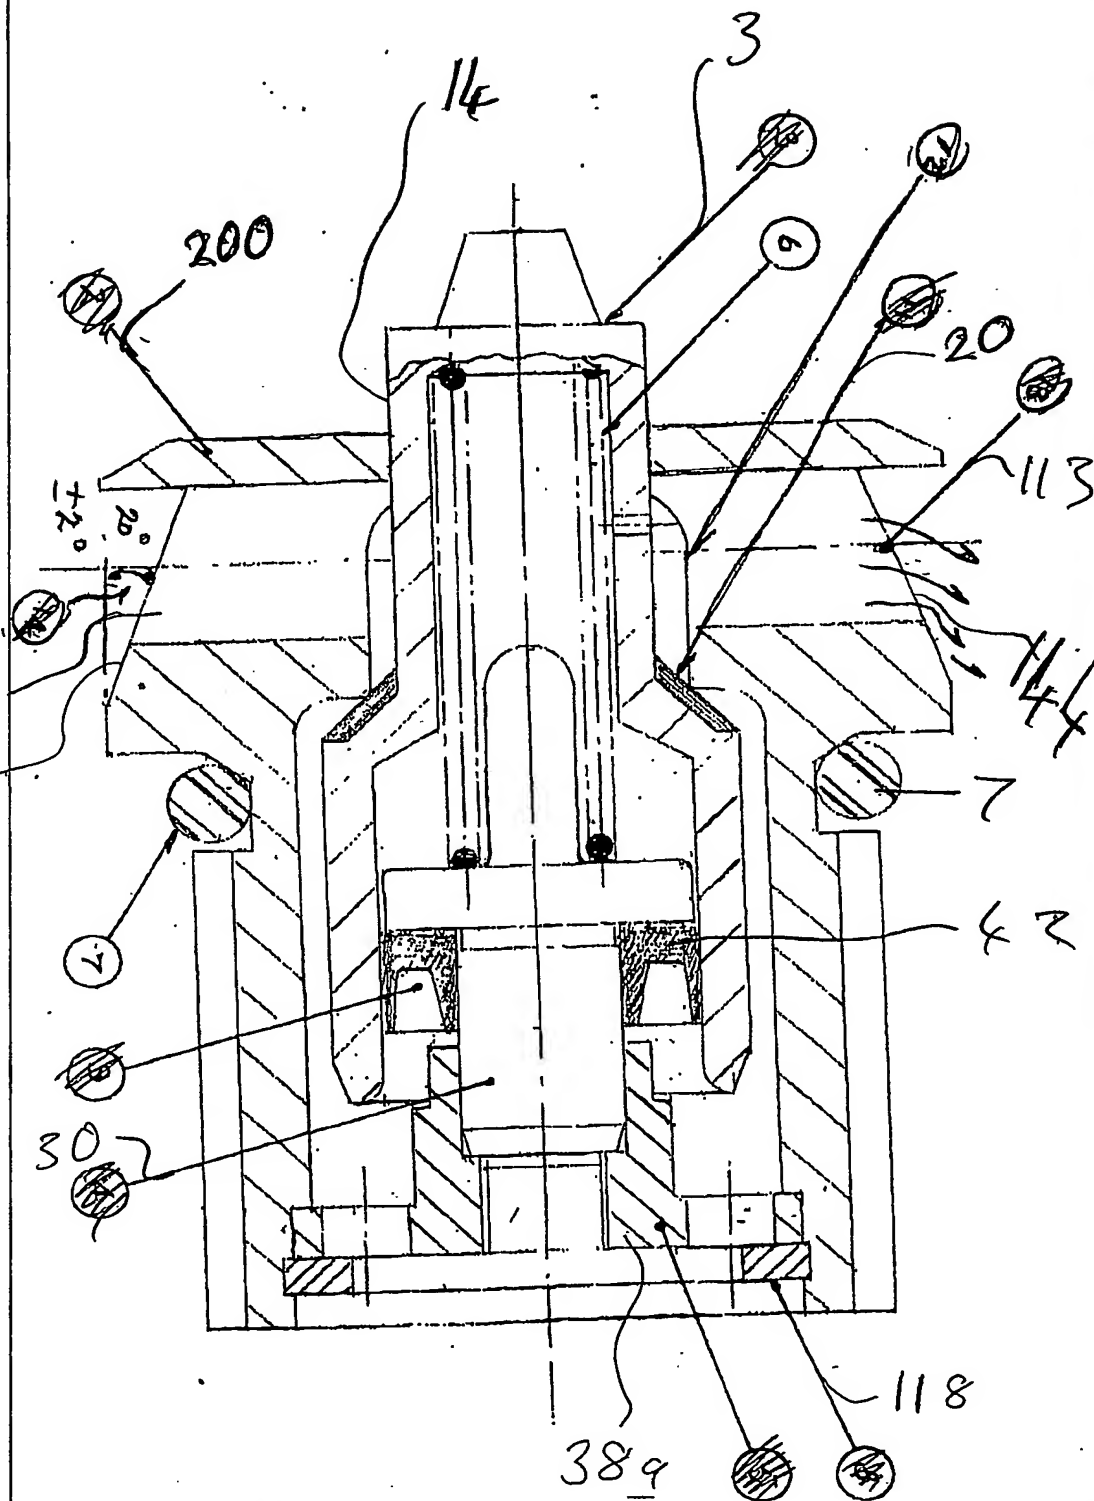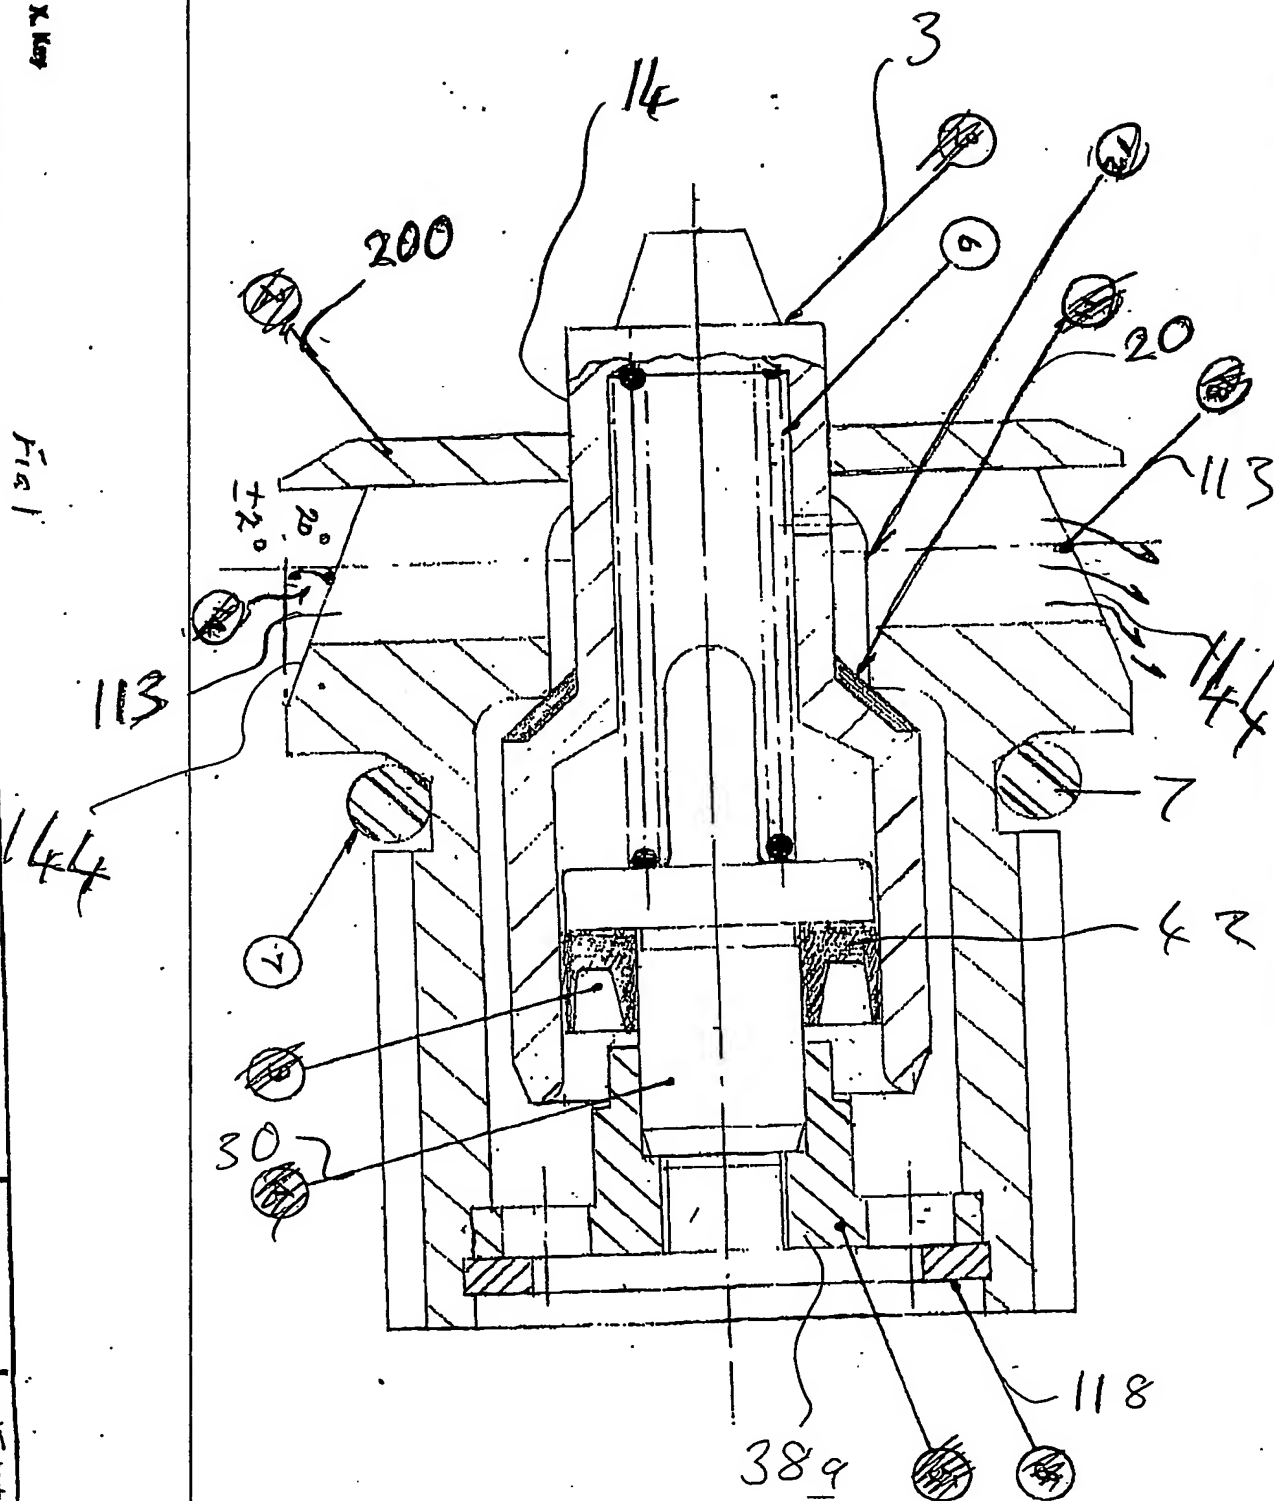

5/7

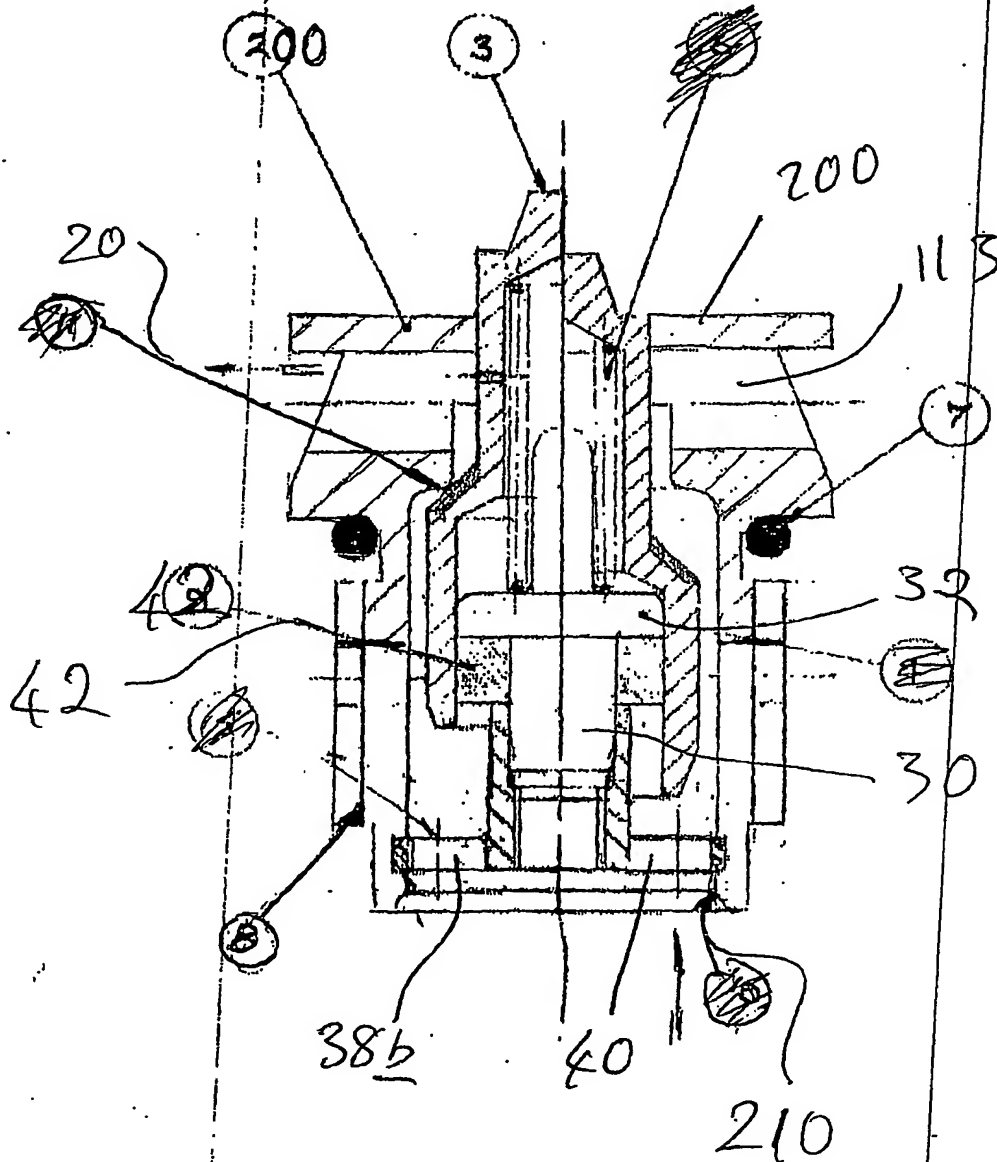


Fig 6

Fig 2.

© F. X. Key

PROPRIETARY
& CONFIDENTIAL



DEVELOPMENTS

THE OLD SCHOOL HOUSE, AKELEY
BUCKS. MK18 5HB

COLLET - TYPE
K.J.M. MODULE (H.P.)

2-9-04/14

Sketch 1

6/7

~~10221~~

THE OLD SCHOOL HOUSE, ADELETTOWN

Valve Body - 04: 5.6

MATL:
Reas.
RS. 243.

GEN TOL: $\pm .1$
GEN TIR: θ / μ
CONCENTRICITY:
-06 TIR
SCALE $\sim 4:1$

2.9/2

**PROPERTY 439
& CONFIDENTIAL**

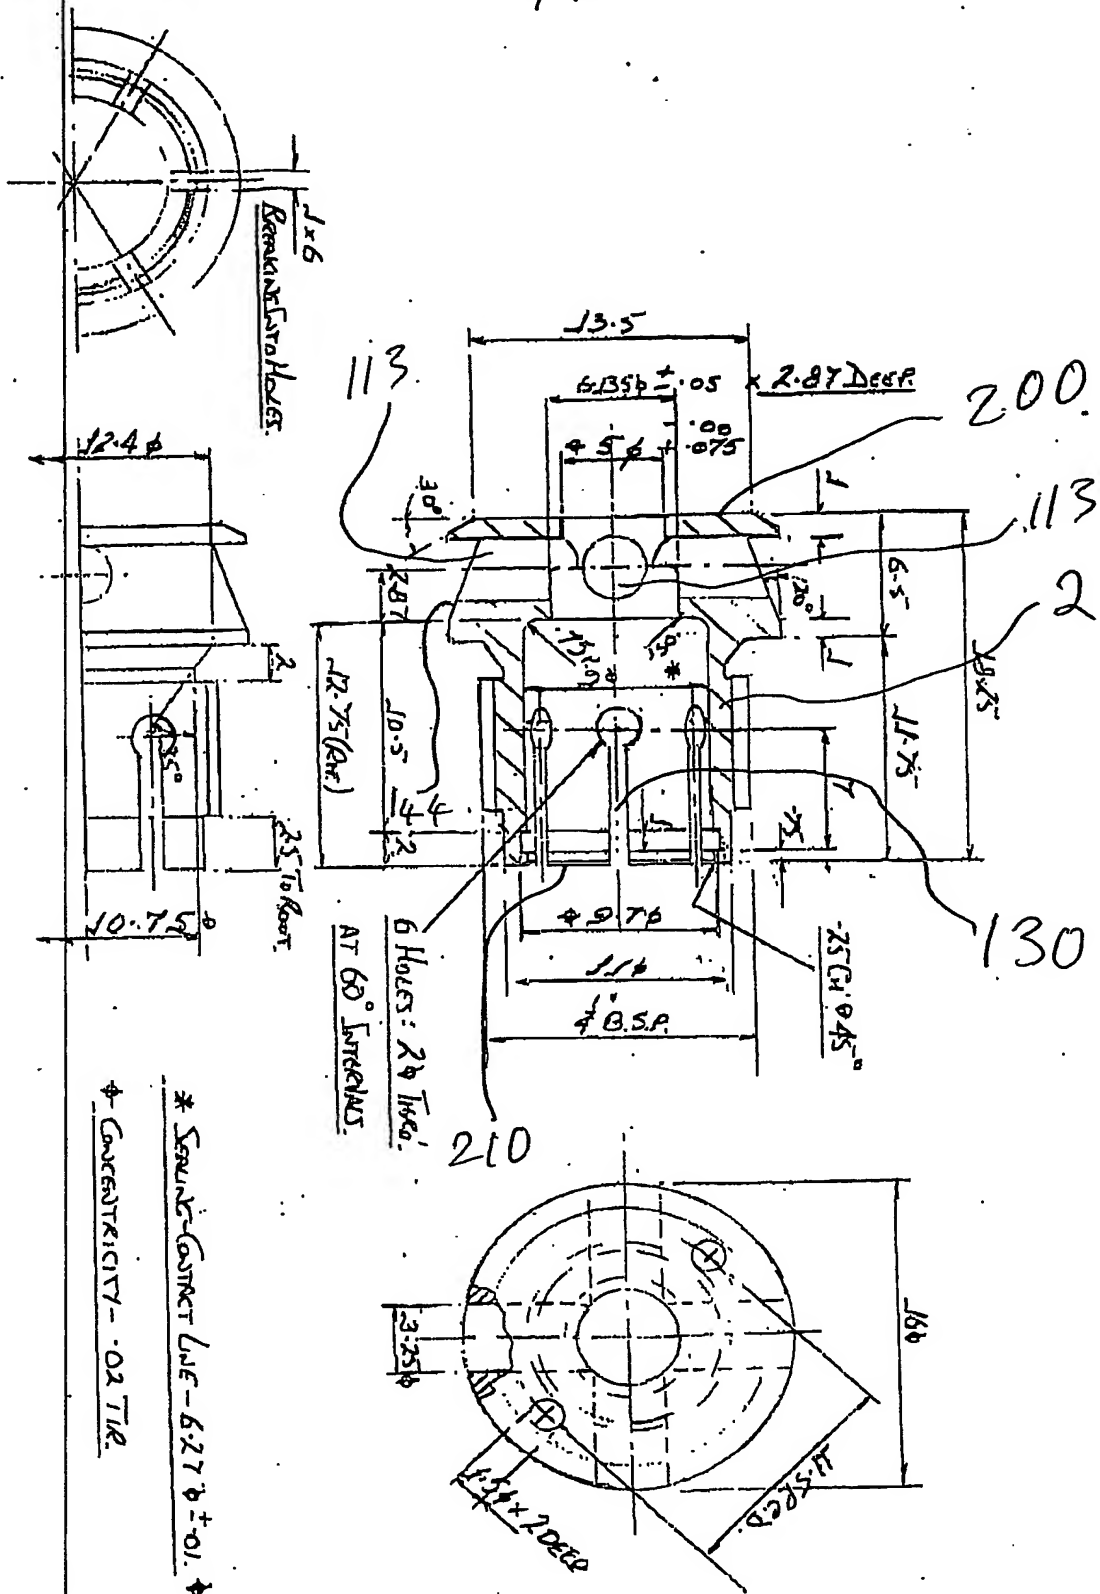


Fig 7

7/7

2.15 ± 0.075

7/10

7/10

304

302

A

7/10

3/10

300

5.924

5.48 (REF)

3.8 ± (REF)

3.084

.75

5.144 ± 0.05

5.824

3.454

2.854

7/10

(15°) (5°)

2.56 (REWORK)
2.56 (REWORK)

© F. X. King

Fig. 8

PROPERTY
& CONFIDENTIAL

DEVELOPMENTS

THE OLD SCHOOL HOUSE, ADELEY
BRIDGE, WICK 988


Project SCA - 04. (KIM MODULE)

MAILED
PT. F.E.
GRAPHIC
FILED.

Gen. Tol.: ± .075
Gen. Fin.: d 1/16
Concentricity:
-.05 TIR.
Scale ~ 50:1

2-9-04/6

PCT Application
GB0305197



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.